


Valj in bat
Cylinder and piston

D (mm)	
A	B
38,01 ^{+0,01}	38,02 ^{+0,01}

D1 D max 0,012 mm
Dovoljena ovalnost — 0,006 mm
D1 D max 0,012 mm
Allowable ovality 0,006 mm

	d 1	d 2	d 3	d 4
a	37,95 ^{+0,01}	37,91 ^{+0,01}	37,86 ^{+0,02}	37,84 ^{+0,02}
b	37,95 ^{+0,01}	37,92 ^{+0,01}	37,87 ^{+0,02}	37,85 ^{+0,02}

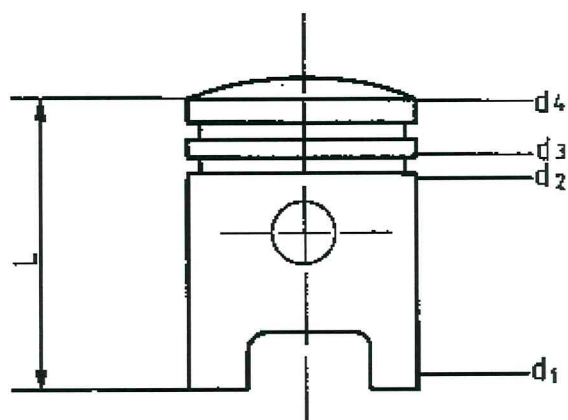

L = 50 mm, 55 mm
Bat L nadmera — Ø 38,50 mm
Piston 1st oversize — Ø 38,50 mm
Valj se brusi po tabeli:
The following table is used to rebore the cylinder:

D	
A	B
38,51 ^{+0,01}	38,52 ^{+0,01}